


OPTIGREEN FKM 60

Meander Water Retention Board

Drainage and storage element with significant drainage-delaying action and permanent water reservoir made from deep-drawn recycled HDPE. For use with extensive and intensive green roofs with a multi-layer construction on roofs with up to 5° roof pitch.

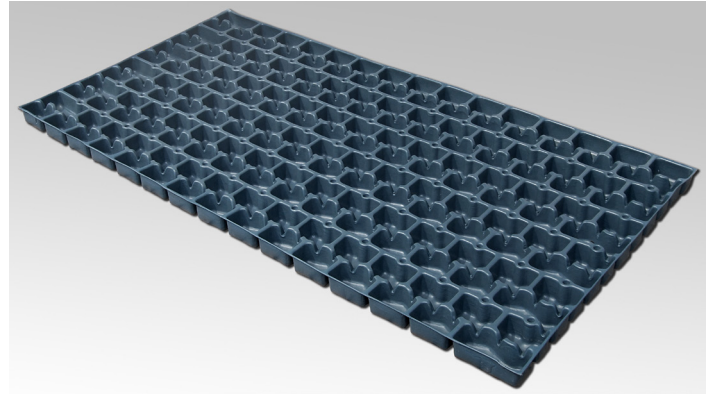

Material	Recycled HDPE
Nominal thickness	approx. 60 mm
Grammage	approx. 2.8 kg/m ²
Colour	black/grey
Max. compressive strength	approx. 97.4 kN/m ² with 27.4 % compression (DIN EN ISO 25619-2)
Water reservoir unfilled	approx. 17.5 l/m ² permanently and up to 14.5 l/m ² temporarily
Water discharge capacity (DIN EN ISO 12958)	Measured at: $\sigma = 20$ kPa, soft/rigid, MD, with a Type 105 filter fleece on the upper side: $i = 0.01$ (=1 % roof pitch): 0.48 l/(m*s) $i = 0.02$ (=2 % roof pitch): 0.70 l/(m*s) $i = 0.05$ (=5 % roof pitch): 1.13 l/(m*s) $i = 1$ (vertical): 5.49 l/(m*s)
Discharge coefficient at 2% roof pitch	- unfilled with filter fleece and 60 mm multi layer substrate: $C = 0.17$ - unfilled with filter fleece and 80 mm multi layer substrate: $C = 0.13$
Discharge coefficient at 0% roof pitch (tested as per the FLL guideline)	- unfilled with filter fleece and 60 mm multi layer substrate: $C = 0.08$ - unfilled with filter fleece and 80 mm multi layer substrate: $C = 0.05$
Filling volume	approx. 50 l/m ²
Quantity/delivered unit	1.8 m ² /pallet = 1.9 x 0.95 m 126 m ² /disposable pallet
Delivery form	126 m ² on disposable pallet 2.05 x 1.05 m (70 pieces)
Pack size	LxWxH 1,900 x 950 x 60 mm
Delivery weight	approx. 5.05 kg/panel - approx. 380.0 kg/full disposable pallet

Area of use

Beneath extensive and simple intensive green roofs, unfilled, with FIL 105 filter fleece and multi layer substrate for water reservoir and targeted water discharge delay.

Specific properties

- 100% recycled HDPE
- Drainage according to DIN 4095
- Significantly delayed discharge of excess water
- Low weight
- Prevents accumulation of water for non-pitched roofs and large drainage lengths
- High retention with high drainage capacity
- High permanent water storage capacity
- Recyclable

The preceding details are guideline values established under laboratory conditions. These values are subject to a certain manufacturing tolerance. The data contained in this product information sheet represents Optigreen's technical knowledge at the time of publication. Optigreen reserves the right to change and update details in accordance with new insights and to modify specified properties accordingly. No liability accepted for misprints.

Optigrün international AG

Am Birkenstock 15 – 19,
 72505 Krauchenwies-Göggingen
 Tel. +49 7576 772-0, Fax +49 7576 772-299, info@optigruen.de

Optigreen Limited (Service UK only)

Suite G5 Albany Chambers, 26 Bridge Road East
 Welwyn Garden City (Herts), AL7 1HL
 Phone +44 203 5899400, Fax +44 207 1171664, info@optigreen.co.uk

