


OPTIGRÜN FSA 40U

Negative Pressure Drainage Inspection Chamber

Inspection chamber for holding space around roof outlets with high drainage capacity. With connection options for 4 Optigrün Water Conduction Gutters WRA 25-8 or WRA 25-12.

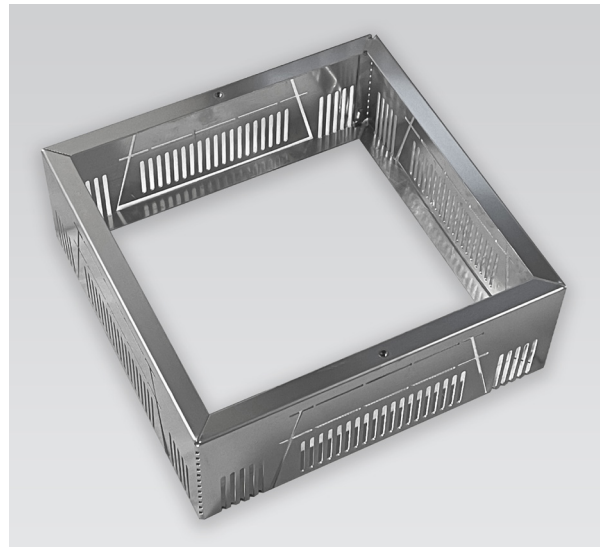

Material	Aluminium
Colour	Aluminium natural
Material thickness	2 mm
Dimensions	L 400 x W 400 x H 140 mm can be raised in 50 mm and 100 mm increments
Quantity/delivery unit	Chamber base part without cover
Delivery form	according to size of order by parcel shipment or by forwarding agent
Pack size	according to size of order
Delivery weight	approx. 1.3 kg/piece

Area of use

- Inspection chamber above roof outlets with high drainage capacity, e.g. with negative pressure drainage

Specific properties

- Connection options for 4 Optigrün Water Conduction Gutters WRA 25-8 or WRA 25-12
- Inlet openings in the chamber walls
- With rivet nuts for fastening further chamber components
- Insensitive to humic acids
- Combination with different covers possible
- Further accessories available separately

The preceding details are guideline values established under laboratory conditions. These values are subject to a certain manufacturing tolerance. The data contained in this product information sheet represents Optigrün's technical knowledge at the time of publication. Optigrün reserves the right to change and update details in accordance with new insights and to modify specified properties accordingly. No liability accepted for misprints.

Optigrün international AG

Am Birkenstock 15 – 19,
72505 Krauchenwies-Göggingen
Tel. +49 7576 772-0, Fax +49 7576 772-299, info@optigruen.de

Optigrün Limited (Service UK only)

Suite G5 Albany Chambers, 26 Bridge Road East
Welwyn Garden City (Herts), AL7 1HL
Phone +44 203 5899400, Fax +44 207 1171664, info@optigruen.co.uk

