


# OPTIGREEN RMS 900

## Protection and Storage Fleece

To protect the waterproofing with a moderate load with an additional separating and water reservoir function.

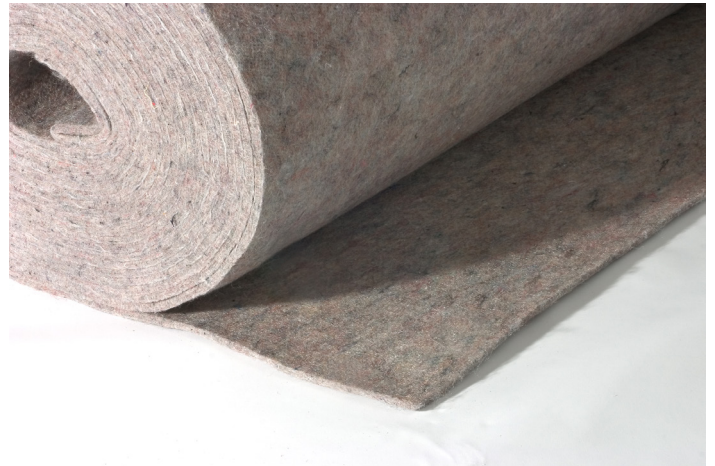

<b>Material</b>	PP/PES/acrylic recycled fibres
<b>Nominal thickness</b>	approx. 6.0 mm
<b>Grammage</b>	approx. 900 g/m <sup>2</sup>
<b>Colour</b>	multicolour with print
<b>Geotextile robustness class</b>	GRC 4
<b>Water reservoir</b>	approx. 6.0 l/m <sup>2</sup>
<b>Delivery weight</b>	approx. 45.0 kg/roll - approx. 290.0 kg/full euro pallet
<b>Pack size</b>	Diameter approx. 0.42 m, height approx. 2.0 m / per roll
<b>Quantity/ delivered unit</b>	50 m <sup>2</sup> /roll = 2.0 x 25.0 m 300 m <sup>2</sup> /euro pallet
<b>Delivery form</b>	6 rolls on euro pallet 800 x 1,200 mm
<b>Mechanically strengthened</b>	Yes
<b>Detector tested</b>	Yes
<b>Rotproof</b>	Yes

### Area of use

- As a protective layer on waterproofing with an additional separating and water reservoir function, in accordance with DIN 18195-Part 2
- As a protective layer on waterproofing with a moderate mech load
- Separation of products made from incompatible materials (e.g. PVC and bitumen)
- Storage of water and nutrients

### Specific properties

- 100% recycled plastic fibre (PP/PES/acrylic)
- protects against damage to waterproofing with a moderate mechanical load.
- Water reservoir approx. 6.0 l/m<sup>2</sup>
- Fulfilment of the requirements of the FLL roof greening directives
- Mechanically strengthened
- Detector tested
- Rotproof
- Recyclable

The preceding details are guideline values established under laboratory conditions. These values are subject to a certain manufacturing tolerance. The data contained in this product information sheet represents Optigreen's technical knowledge at the time of publication. Optigreen reserves the right to change and update details in accordance with new insights and to modify specified properties accordingly. No liability accepted for misprints.

### Optigrün international AG

Am Birkenstock 15 – 19,  
72505 Krauchenwies-Göggingen  
Tel. +49 7576 772-0, Fax +49 7576 772-299, info@optigruen.de

### Optigreen Limited (Service UK only)

Suite G5 Albany Chambers, 26 Bridge Road East  
Welwyn Garden City (Herts), AL7 1HL  
Phone +44 203 5899400, Fax +44 207 1171664, info@optigreen.co.uk

